


[illegible]

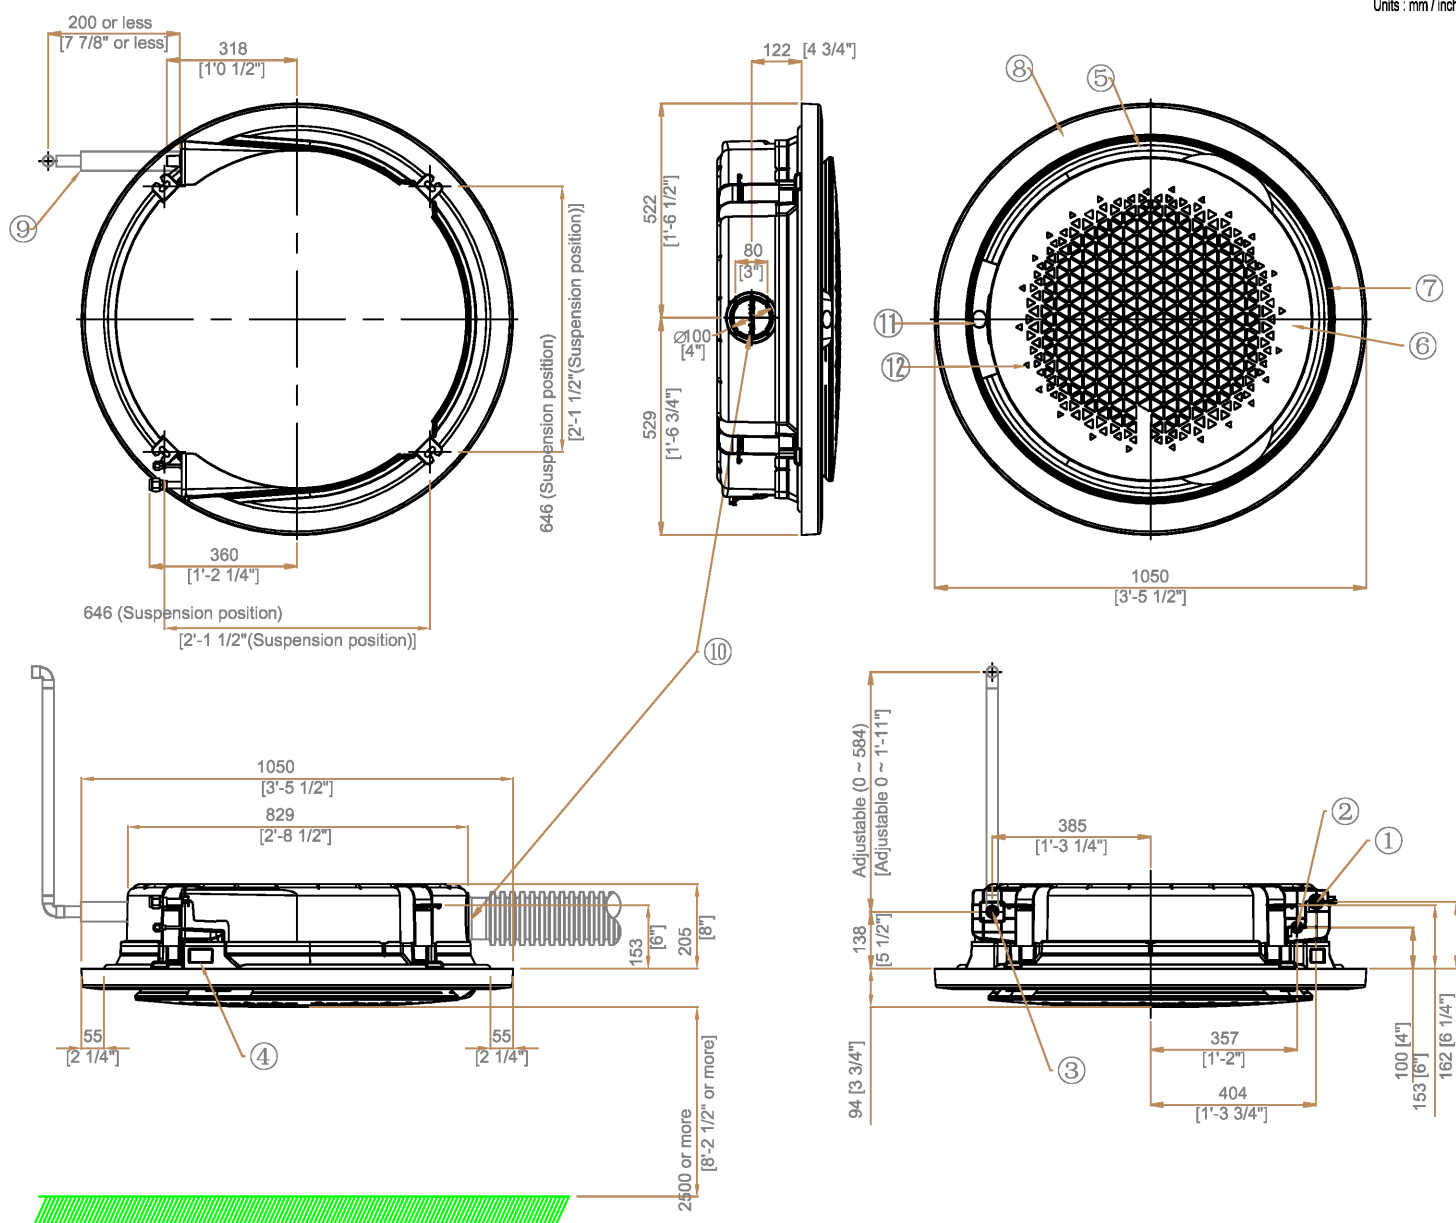

Note

1. Make sure the spacing between the ceiling and the cassette is no more than 10mm[3/8"].
2. When the conditions exceed 30 [86 °] and RH 80% in the ceiling or fresh air is induced into the ceiling, and additional insulation is required (polyethylene foam, thickness 10mm[3/8"] or more)
3. Open type panel model code : PC4NUNMAN

Table of descriptions

1	Refrigerant gas pipe	7	Suction rim for Booster fan
2	Refrigerant liquid pipe	8	Decoration cover
3	Condensate drain	9	Drain hose
4	Power & Comm. wiring conduits	10	Fresh air intake knock out hole
5	Air discharge opening	11	Display window
6	Air suction grille	12	Infrared receiver

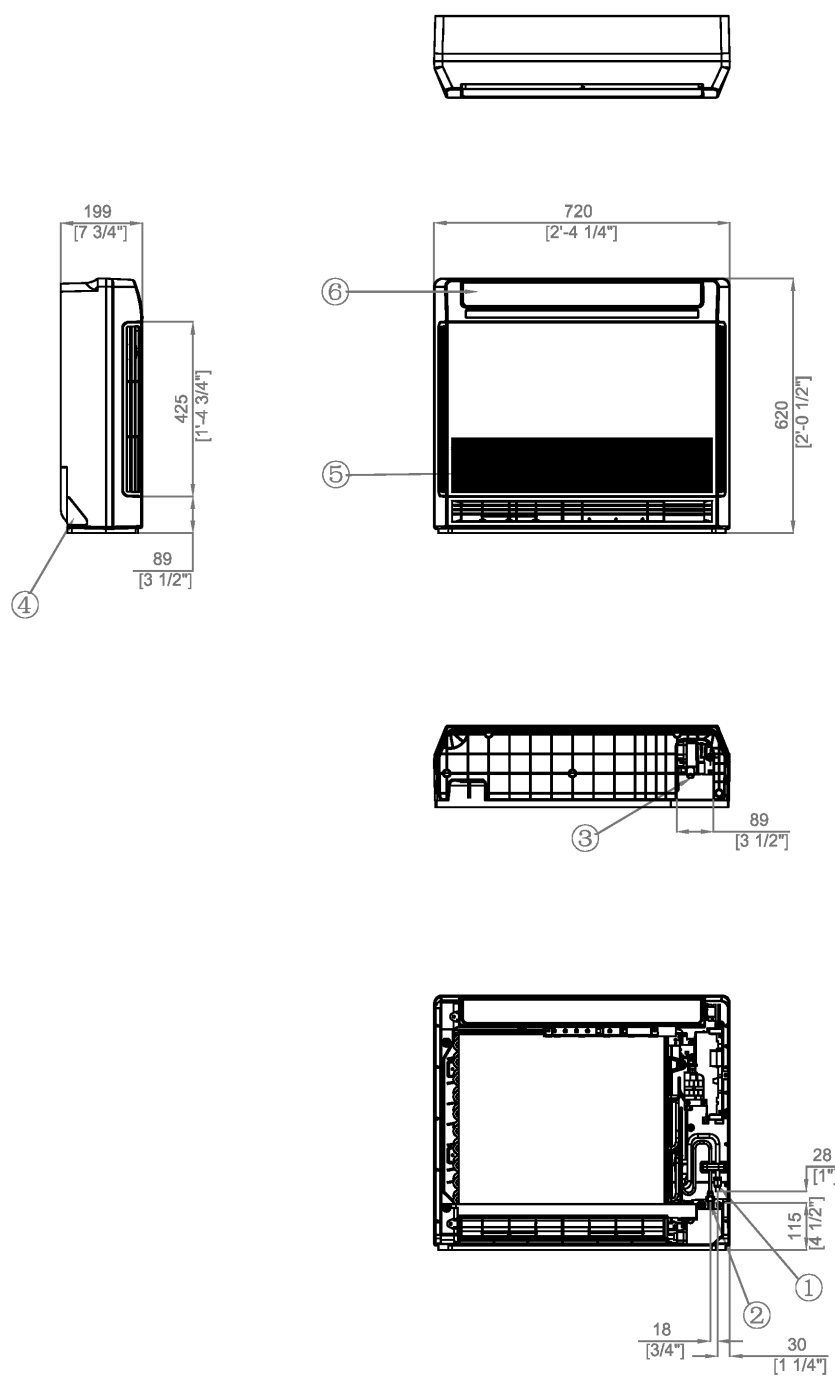


Table of descriptions

1	Refrigerant gas pipe	7	
2	Refrigerant liquid pipe	8	
3	Condensate drain	9	
4	Power & Comm. wiring conduits	10	
5	Air Inlet grille	11	
6	Air Outlet grille	12	

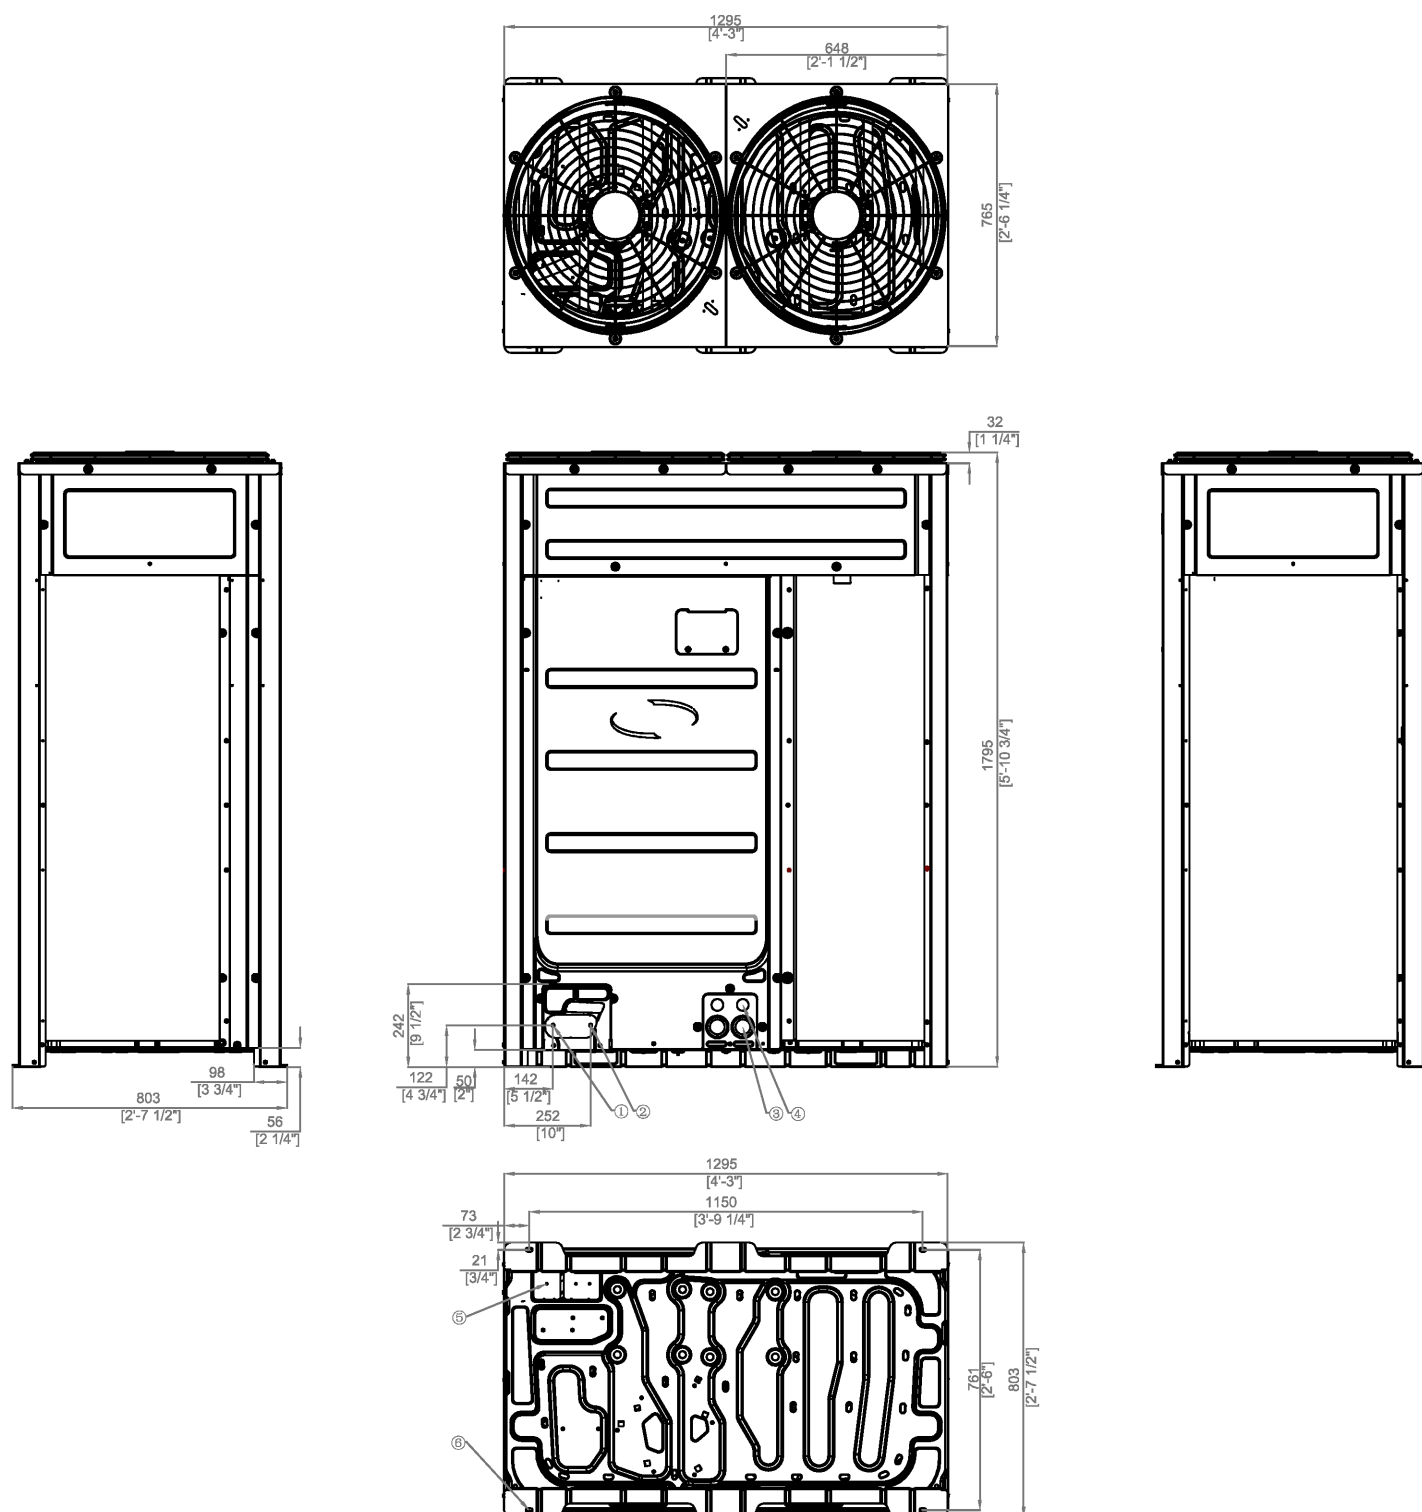


Table of descriptions

1	Gas Ref. pipe	7	
2	Liquid Ref. pipe	8	
3	Power wiring conduit	9	
4	Communication wiring conduit	10	
5	Knock-out Hole for Ref. Piping	11	
6	Anchor Bolt Hole	12	